



RUGGED YET SLEEK

HIGHLIGHTED FEATURES

19' THROW CONVEYOR

With tough chevron belt

OPERATING WEIGHT

Of 17.000 lbs.

WASHED ALUMINUM HOPPER

Polished & coated with Nanokote®



STRONG LONG, LASTING STRUCTURE

With HARDOX® 450 frame

148HP ENGINE

CAT® Tier 4 ACERT™ diesel engine

WIRELESS
REMOTE CONTROL

With Danfoss transmitter/receiver



WHAT'S INCLUDED

Our basic model is still packed with all the options that the competition charges extra for.

HYDRAULICS

- •75 GA Aluminum hydraulic tank
- •Danfoss® PVG32 valves
- •2 piston pumps (75CC)
- •2 high pressure filters 2 return filters, 3 case drain filters for complete oil filtration
- •4000 RPM hydraulic vibrator
- •Stainless steel hydraulic tubing = NO RUST!
- High performing thermostatically controlled hydraulic cooler (Includes manual override function for constant operation)
- Automatic leveling system with transmitter override control

THROW CONVEYOR

- •19' throw conveyor with tough chevron belt
- •2 stone traps for maximum conveyor performance
- •Splined shaft direct drive throw motor
- ·Slewing gear swing frame

FEED BELT

•2 Ply 220 feed belt with high quality chain driven belt •Direct drive live bottom feed belt driven and controlled by 2 speed piston motor

ELECTRONICS

- •Wireless remote control with Danfloss wireless transmitter and receiver
- •Control panel screen for Eliminator operation (includes temperature and pressure digital readouts, select hydraulic function control, engine codes)
- Advanced diagnostics for quick and easy troubleshooting

LIGHTING

- •2 strobes and 2 beacons with dedicated switch
- •2 LED flood lamps (4320 lumen each)

AUTO GREASER

•Complete box and chassis greaser system using high quality SETI Imports

TODAY FOR MORE INFORMATION OR TO SCHEDULE YOUR BUILD.

ELIMINATOR FEATURES

DIMENSIONS

- •Overall width: 101.5 in. (2578 mm)
- •Overall length: 282 in. (7163 mm)
- •Wheelbase: 150 in. (3810 mm)
- •Rear loading height: 75 in. (1905 mm)
- •Operating weight: 17,000 lbs. (7,711 kg)

ENGINE


- •CAT® Tier 4 ACERT™ 148 HP Diesel Engine
- •50 GA Fuel Tank

DRIVETRAIN

- •Dana Italia® planetary drive axles with separate front and rear steer
- •Low speed and high-speed operation controlled from the transmitter

BODY

- •Washed aluminum hopper, polished, coated with Nanokote® PRIMO-9SHIELD™
- •HARDOX® 450 steel frame
- Hydraulic operated wing extensions
- •4" plastic hopper liner
- •20" x 22" x 48" polished aluminum toolbox

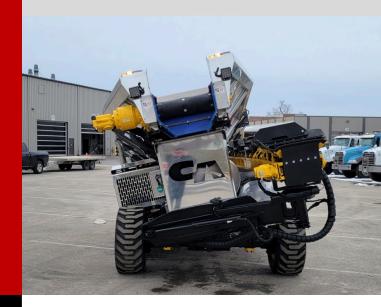



@canamericanstonespreader



stonespreader.com



@canamericanstonespreader